


TECHNICAL SCHEME

ICE QUEEN 200C

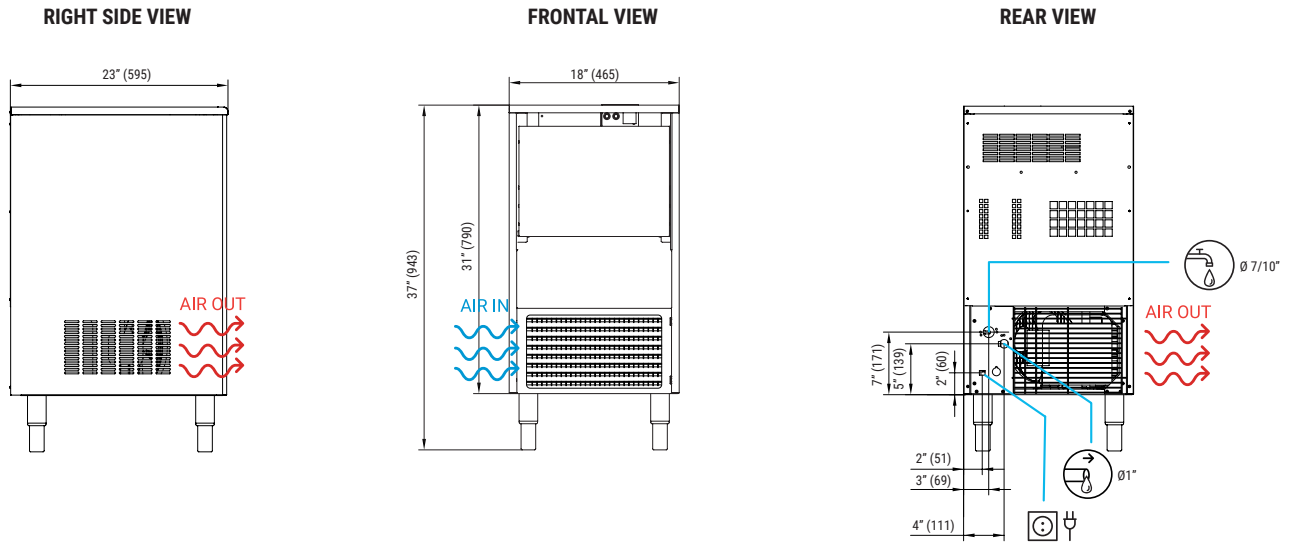

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

Icon	Value	IQ 200C AIR COOLED					IQ 200C WATER COOLED							
		50° 10°	60° 15°	70° 21°	86° 30°	50° 10°	60° 15°	70° 21°	86° 30°					
⚡	±10% V													
🏠	41°F/109°F													
🌡️	41°F/95°F													
💧	14.5 psi (1 bar) / 87 psi (6 bar)													
🔌	V Hz ph	115	60	1N										
🌡️	Temp. Ev.	235	218	191	164	240	223	198	170					
🏠	ASHRAE CONDITIONS	220	202	168	141	225	207	174	146					
🌡️	CONDICIONES ASHRAE	200	175	140	120	205	179	145	124					
🔌	100lbs 90°F / 70°F	177	150	118	97	181	153	122	100					
🔌	43°													

MODELS	Temp. Ev. (°F)	ASHRAE CONDITIONS (BTU/h)	(W)	(W) 109°F	(AWG/mm²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h)	(W)	(lbs)	(lbs)		
IQ 200C A	14°	3,115	913	533	14/1.5	3	10	12	12	4.2	2,429	712	128	139
IQ 200C W	14°	3,115	913	533	14/1.5	3	10	12	47.6	17	2,429	712	128	139




ITV Ice Makers, Inc.
 9550 Satellite Blvd, Suite 100
 Orlando, FL 32837
 Phone: 1 407 826 1860 | Fax: 1 407 826 1861
 Toll Free: 1 888 488 1423
 sales@itvice.com | www.itvice.com

SERVICE
 service@itvice.com
 Skype: service@itvice.com
 PHONE: +1 888 488 1423
 FROM 8AM TO 5PM EST

2 ADDITIONAL YEARS ON COMPRESSOR & EVAPORATOR
 Read our warranty policy to know more about limitations and exclusions

0000_itvice/renas_24/07/18

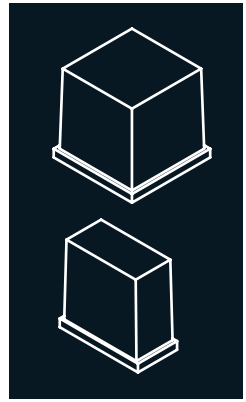

3 YEARS WARRANTY
PARTS & LABOR

SPIKA MS700-22

115 V / 60 Hz

MODULAR 22 INCH ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES FULL DICE OR HALF DICE ICE CUBES
- ▶ HIGH EFFICIENCY EVAPORATOR
- ▶ SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- ▶ EASY ACCESS FOR SERVICE BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- ▶ SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- ▶ HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL



	 24 H	 70°F/21°C lbs (Kg)	 50°F/10°C lbs (Kg)	 90°F/32°C lbs (Kg)	 70°F/21°C lbs (Kg)	 in (mm)	 in (mm)	 SPIKA HALF DICE 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions	 SPIKA FULL DICE 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA MS700-22 H		668 (303)	553 (251)	Width 22" (559)	Width 25.6" (650)	Depth 24.45" (621)	Depth 27.96" (710)		
SPIKA MS700-22 F		676 (307)	527 (239)	Height 25.95" (659)	Height 32.29" (820)				

ACCESSORIES

INCLUDED



SCOOP



WATER OUTLET HOSE


NOT INCLUDED



DOUBLE 10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS102



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



ADAPTER PLATES



SCALE KLEEN

RECOMMENDED BINS

RECOMMENDED



S400
+ SPIKA
MS700-22



SCS350
+ SPIKA
MS700-22

OTHER POSSIBLE OPTIONS



S500
+ SPIKA
MS700-22



S750
+ SPIKA
MS700-22



S900
+ SPIKA
MS700-22



S1050
+ SPIKA
MS700-22



SCS700
+ SPIKA
MS700-22



SCD900
+ 1/2 SPIKA
MS700-22



SCD1350
+ 1/2 SPIKA
MS700-22



SCD1800
+ 1/2 SPIKA
MS700-22